


# PULLALIGN® Lite 2

The efficient and quick method to align your pulleys.  
It's so easy, everyone can do it.

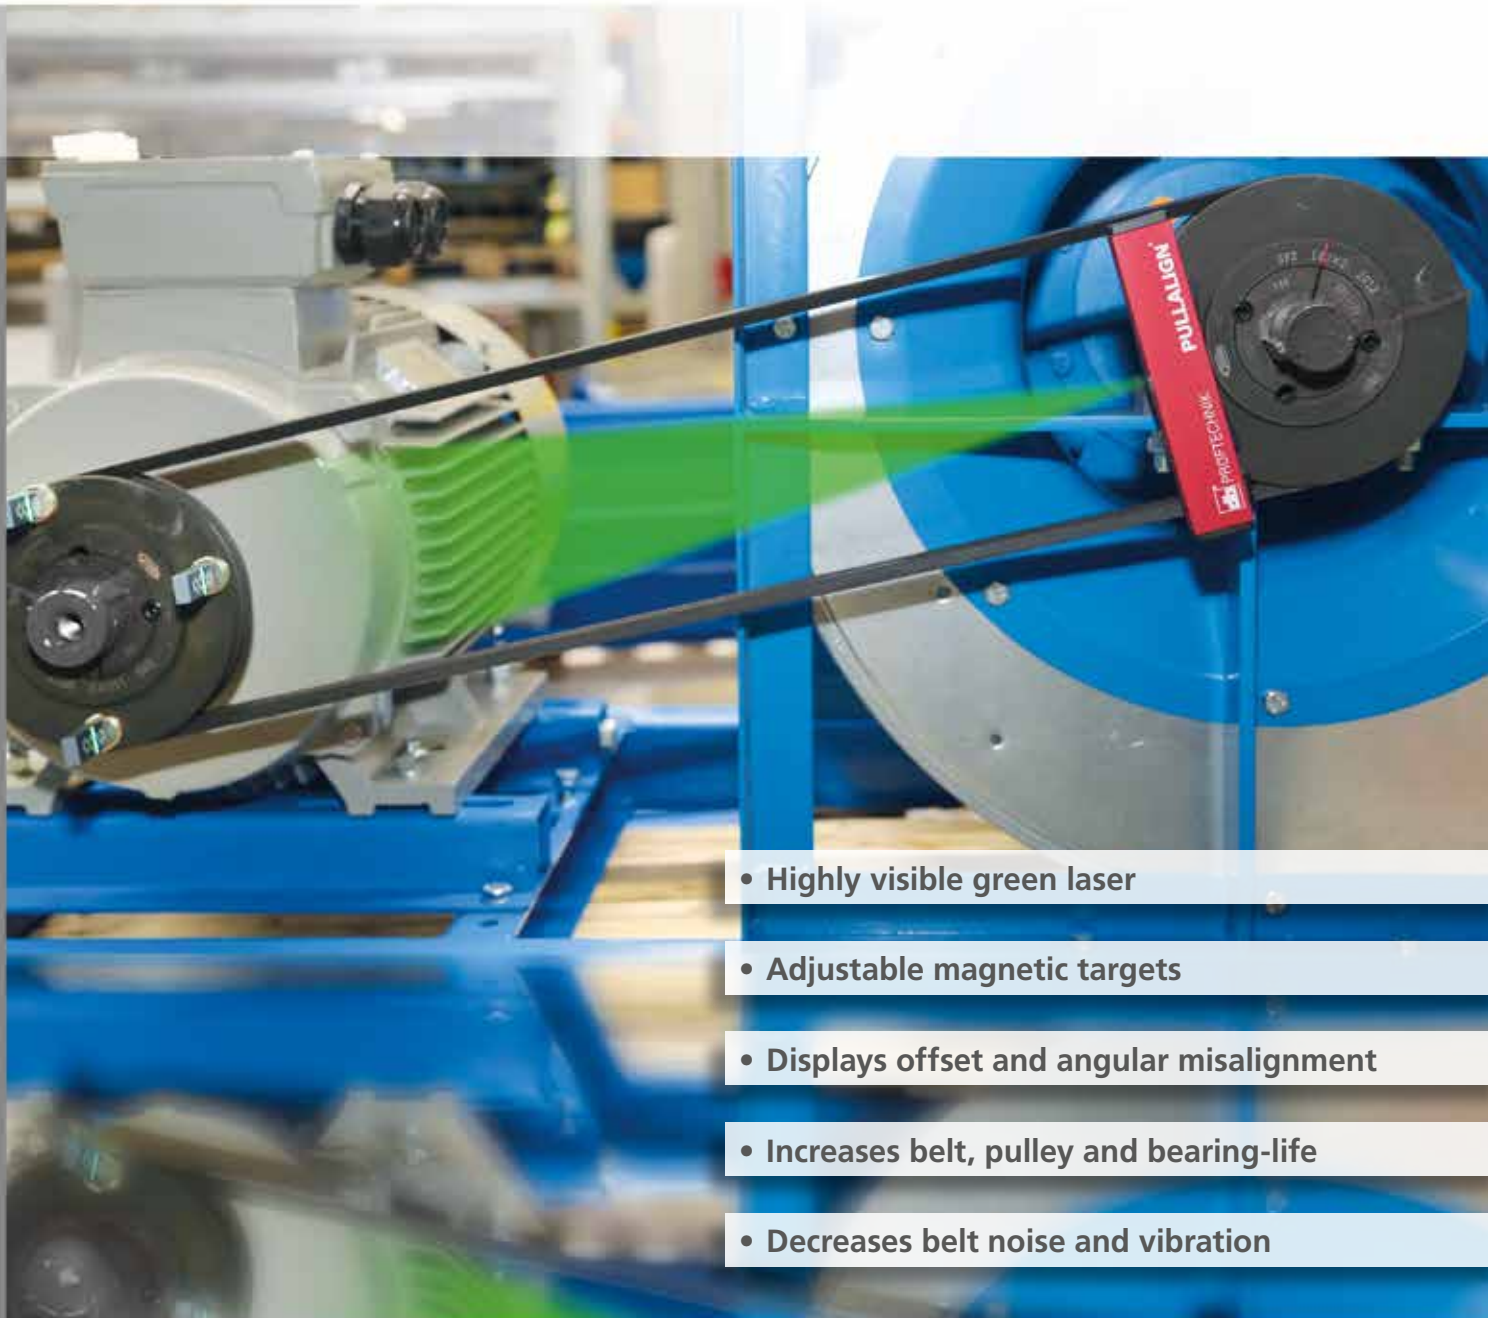

- Highly visible green laser
- Adjustable magnetic targets
- Displays offset and angular misalignment
- Increases belt, pulley and bearing-life
- Decreases belt noise and vibration

# PULLALIGN® Lite 2

## Small device, big impact

Precisely aligned belt driven machines save energy, and wear and thus decrease costs. With the new PULLALIGN Lite 2 pulley driven machines can easily be aligned by anyone, without training.

Set up the new green PULLALIGN Lite 2 laser and install the three adjustable magnetic targets. The laser beam mounted on the pulley projects a virtual plane onto the targets, which are mounted on the opposite pulley.

The misaligned pulley can easily be aligned by adjusting the machine until the green laser beam hits into the middle of all three targets; confirming that both offset and angle of the pulley driven machine have been aligned.

The green laser beam increases visibility in brightly lit machine halls or outdoor in strong sunlight.

| Technical data Laser   |  |
|------------------------|--|
| Accuracy               | 0,2°   |
| Laser wavelength       | 505 – 535 nm                                       |
| Output power           | <1 mW  |
| Classification         | CLASS 2  |
| Laser line length      | 7 m at 5 m distance [23 ft at 16 ½ ft distance]    |
| Measuring distance     | 10 m [33 ft] between laser & targets               |
| Operating time         | 17 hours   |
| Battery type           | 4x AAA alkaline batteries                          |
| Operating temperature  | -5°C to 40°C [23° F to 104° F]                     |
| Storage temperature    | -10°C to 70°C [14° F to 158° F]                    |
| Weight                 | 320g w/batteries [11,3 oz]                         |
| Dimensions             | 37 mm x 40 mm x 170 mm [1 ½" x 1 9/16" x 6 11/16"] |
| Housing                | anodized Aluminum                                  |
| Technical data Targets |  |
| Quantity               | 3  |
| Size (height):         | 45 mm [1 ¾"]                                       |
| Weight                 | 3 x 35g [3 x 1,2 oz]                               |
| Housing                | anodized Aluminum                                  |



PULLALIGN® is a registered trademark of PRÜFTECHNIK Dieter Busch AG. No copying or reproduction of this information, in any form whatsoever, may be undertaken without express written permission of PRÜFTECHNIK Dieter Busch AG. The information contained in this leaflet is subject to change without further notice due to the PRÜFTECHNIK policy of continuous product development. PRÜFTECHNIK products are subject to patents granted or pending throughout the world. © Copyright 2017 by PRÜFTECHNIK Dieter Busch AG.

USA  
PRUFTECHNIK Inc.  
7821 Bartram Ave.  
Philadelphia, PA 19153  
Toll free: +1 844 242-6296  
Fax: +1 215 893-3902  
usa@pruftechnik.com  
www.pruftechnik.com

Canada  
PRUFTECHNIK  
4406, rue Louis-B.-Mayer  
Laval, QC H7P 0G1  
Tel: +1 514 738-6565  
Fax: +1 514 227-5455  
info@pruftechnik.ca  
www.pruftechnik.ca



PRÜFTECHNIK Condition Monitoring GmbH  
Oskar-Messter-Str. 19-21  
85737 Ismaning, Germany  
Tel.: +49 89 99616-0  
Fax: +49 89 99616-200  
info@pruftechnik.com  
www.pruftechnik.com

A member of the PRUFTECHNIK group